



Sewer Fittings




Reference	\varnothing (mm)	t(mm)	L(mm)	L1(mm)	Notes
BR75ff	75	3	135	45	
BR110ff	110	3	180	55	
BR125ff	125	3	185	55	




Reference	\varnothing (mm)	t(mm)	L(mm)	L1(mm)	Notes
BR75fm	75	3	130	40	
BR110fm	110	3	180	55	
BR125fm	125	3	190	60	
BR160fm	160	4	250	75	
BR200fm	200	4,5	275	75	

Bend 45° FM




Reference	Ø(mm)	t(mm)	L(mm)	L1(mm)	Notes
BOR75fm	75	3	120	40	
BOR110fm	110	3,5	160	50	
BOR125fm	125	4	185	55	
BOR160fm	160	4	225	70	
BOR200fm	200	4,5	255	80	

Coupler




Reference	Ø(mm)	t(mm)	L(mm)	Notes
CR75	75	3	95	
CR110	110	3,5	125	
CR125	125	4	115	
CR160	160	4	150	
CR200	200	4	155	

Reducing Plug




Reference	Ø1(mm)	Ø2(mm)	L(mm)	L1(mm)	Notes
RPR75-110	110	75	53	36	
RPR75-125	125	75	53	36	
RPR75-160	160	75	54	42	
RPR110-125	125	110	53	39	
RPR110-160	160	110	54	42	
RPR125-160	160	125	54	42	
RPR160-200	200	160	70	58	
RPR200-250	250	200	77	60	

**Branch 90°
FFM**




Reference	Ø(mm)	t(mm)	L(mm)	L1(mm)	Notes
TFR75	75	3	180	45	
TFR110	110	4	275	60	
TFR125	125	4	270	60	
TFR160	160	4	340	75	
TFR200	200	4	405	85	

**Branch 45°
FFM**




Reference	Ø(mm)	t(mm)	L(mm)	L1(mm)	Notes
TYR75	75	3	205	50	
TYR110	110	4	275	50	
TYR125	125	4	305	60	
TYR160	160	4	385	70	

**Technical
Branch 90°**




Reference	Ø(mm)	Ø1(mm)	L(mm)	L1(mm)	Notes
TBR110	110	75	300	60	

Double Branch 90°




Reference	Ø(mm)	t(mm)	L(mm)	L1(mm)	Notes
RTC75	75	3	185	50	
RTC110	110	3,5	260	60	
RTC125	125	3,5	240	55	

Double Branch 45°

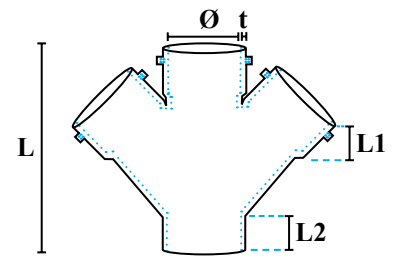

Reference	Ø(mm)	t(mm)	L(mm)	L1(mm)	L2(mm)	Notes
TYR110	110	4	325	75	80	


Roof Ventilation Cap



Reference	Ø(mm)	t(mm)	L(mm)	L1(mm)	Notes
RVR110SC	110	3	100	55	




Plug



Reference	$\varnothing(mm)$	$t(mm)$	$L(mm)$	$L1(mm)$	Notes
PR75	75	3	70	50	
PR110	110	3	65	45	
PR125	125	3,5	78	58	
PR160	160	4	78	55	
PR200	200	4	90	70	



Simple Plug



Reference	$\varnothing(mm)$	$t(mm)$	$L(mm)$	Notes
SPR75	75	3	23	
SPR110	110	3	23	
SPR125	125	3	23	
SPR160	160	3	23	
SPR200	200	4	50	